

# Lateral and Base Shear Forces Acting on 20 Stories Building in Bujumbura City during the Seismic Activity

Athanase Ndiokubwayo

► **To cite this version:**

Athanase Ndiokubwayo. Lateral and Base Shear Forces Acting on 20 Stories Building in Bujumbura City during the Seismic Activity. Journal of Civil Engineering Research, 2014, 4, pp.42 - 45. <10.5923/j.jce.20140402.03>. <hal-01080378>

**HAL Id: hal-01080378**

**<https://hal-auf.archives-ouvertes.fr/hal-01080378>**

Submitted on 5 Nov 2014

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Lateral and Base Shear Forces Acting on 20 Stories Building in Bujumbura City during the Seismic Activity

Athanase Ndiokubwayo

Higher Teacher Training School (Ecole Normale Supérieure), Applied Sciences Department, Civil Engineering Section,  
Boulevard du 28 Novembre, Bujumbura-Burundi

**Abstract** For designing a high-rise building in Bujumbura city, it is very important to know that the city is located in the seismic zone and therefore take adequate conceptual measures. This study was inspired by a tendency to high-rise building in Bujumbura city while the designers of these buildings do not have sufficient data on the impact of seismic activity in the area lying in the extension of the Rift Valley. By referring to the International Building code (Berkeley 2003) and the ASCE7 data, it is easy to draw a response spectrum curve for Bujumbura city based on the short period ground motion range ( $T_0$ ), the characteristic period of ground motion ( $T_s$ ) and the spectral response acceleration  $S_s$  and  $S_1$ . By using the Extended Three Dimensional Analysis of Building Systems (ETABS) software for the 20 stories building, the seismic base shear forces ( $V$ ) can reach -2000KN and the seismic stories lateral forces ( $F_x$ ) can reach 230 KN.

**Keywords** High-rise building, Seismic base shear forces, Seismic stories lateral forces

## 1. Introduction

The earthquake is a natural disaster that has a detrimental effect on people's lives because it can destroy entire buildings and other social, economic, commercial and touristic infrastructures. In the countries where seismic activity is intense, many human and material damages were already registered. In some of these countries, measures of structural design of high-rise buildings were already taken.

As stated by Midzi V., the vulnerability of the East African populations to seismic events has been underscored by a study which advised that the region's capacity in earthquake preparedness and hazards mitigation need to be improved significantly. [1]

Burundi is located in the Rift Valley area where seismic activity is intense. Unfortunately the building designers do not consider this aspect or do not have reliable data on seismic impact especially as the current trend is the high-rise construction in Bujumbura city.

In the present study, base shear and lateral loading forces were calculated using the Extended Three Dimensional Analysis of Building Systems (ETABS) software. [2]

The Mapped 0.2 sec. Period Spectral Acceleration,  $S_s$  and the Mapped 1.0 sec. Period Spectral Acceleration,  $S_1$  for Bujumbura city are known and are very important for designing a seismic structure [3]. According to the

UFC3-310 01. (2005), Bujumbura city is the sixth city in Africa which has high values of  $S_s$  and  $S_1$  after Algeria, Tunisia, Egypt, Djibouti and Bukavu. [4]

In this study, to determine the values of base shear and lateral forces for the 20 stories building in Bujumbura city, it was very important to calculate first the values of the short period ground motion range  $T_0$  and the characteristic period of ground motion  $T_s$  using the Spectral Response Acceleration  $SMS$  and  $SM_1$ . These factors are necessary in tracing of the response spectrum curve.

## 2. Drawing a Curve of Spectral Response Acceleration for a Building in Bujumbura City

Before drawing the curve of spectral response acceleration for a building in Bujumbura city, we need to know first the values of  $T_0$  and  $T_s$ . These values are given by the following formula:

$$T_0 = \frac{0.2 SD_1}{SDS} \quad \text{and} \quad T_s = \frac{SD_1}{SDS} \quad [5]$$

Where:  $T_0$  = the short period ground motion range  
 $T_s$  = the characteristic period of ground motion  
 $SD_1$  and  $SDS$  = Design Spectral Response Acceleration [6]

$$SD_1 = 2/3 SM_1 \quad \text{and} \quad SDS = 2/3 SMS$$

Where:  $SM_1$  and  $SMS$  = Maximum Spectral Response Acceleration [7]

$$SM_1 = F_1 * S_1 \quad \text{and} \quad SMS = F_a * S_s$$

\* Corresponding author:

athanand@yahoo.com (Athanase Ndiokubwayo)

Published online at <http://journal.sapub.org/jce>

Copyright © 2014 Scientific & Academic Publishing. All Rights Reserved

where **F1** = Velocity-based Site Coefficient (Equal to 1 for Bujumbura site) [8]

**S1** = Mapped 1.0 sec. Period Spectral Acceleration (Equal to 0.26 for Bujumbura site) [9]

**Fa** = Acceleration-based Site Coefficient (Equal to 1 for Bujumbura site) [10]

**SS** = Mapped 0.2 sec. Period Spectral Acceleration (Equal to 0.66 for Bujumbura site) [11]

$$SM1 = 1 * 0.26 = 0.26$$

$$SMS = 1 * 0.66 = 0.66$$

$$SD1 = 2/3 * 0.26 = 0.17$$

$$SDS = 2/3 * 0.66 = 0.44$$

$$T_0 = (0.2 * 0.17) / 0.44 = 0.08$$

$$T_s = 0.17 / 0.44 = 0.39$$

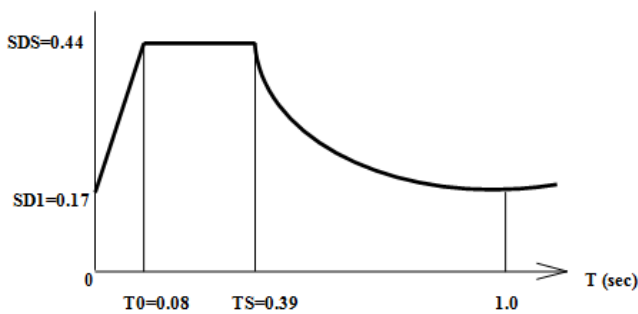


Figure 1. Response spectrum curves

### 3. Lateral Forces ( $F_x$ )

The lateral forces acting on the 20 stories is given by the following equation:

$$F_x = C_{vx} \times V \quad [12]$$

where:  $C_{vx}$  = the vertical distribution factor

$V$  = the shear forces

$$C_{vx} = [W_x h_x^k] / \left\{ \sum_{i=1}^n W_i (h_i)^k \right\} \quad [13]$$

where:  $W_i$  = portion of the total gravity load  $W$  assigned to the level  $i$

$W_x$  = portion of the total gravity load  $W$  assigned to the level  $x$ ;

$h_i$  = height from the base to level  $i$

$h_x$  = height from the base to level  $x$ ;

$k$  = the exponent related to the building period  $T$  and takes into account the whiplash effects in tall slender buildings.

$$T = C_t (h_x)^{3/4} \quad [14]$$

$C_t$  = a period coefficient.

$$k = \frac{(2-1) \times (T-0.5)}{(2.5-0.5)} + 1 \quad (\text{for } 0.5 \text{ sec} < k < 2.5 \text{ sec})$$

The value of  $k$  is equal to 1.75.

### 4. Base Shear Forces ( $V$ )

The base shear forces acting on 20 stories building is given by the following equation:

$$V = C_s \times W \quad [15]$$

where:  $C_s$  = the seismic design coefficient

$W$  = the building reactive weight including cladding.

$$C_s = \frac{SDS}{(R/I)} \leq \frac{SD1}{(TR/I)} \geq 0.044 \text{ SDS} \times 1 \quad [16]$$

Where:

$T$  = the fundamental period ( $T$  is equal to 2)

$R$  = the Seismic Response Modifier ( $R$  is equal to 8)

$$C_s = 0.044 \times 0.44 \times 1 = 0.01936.$$

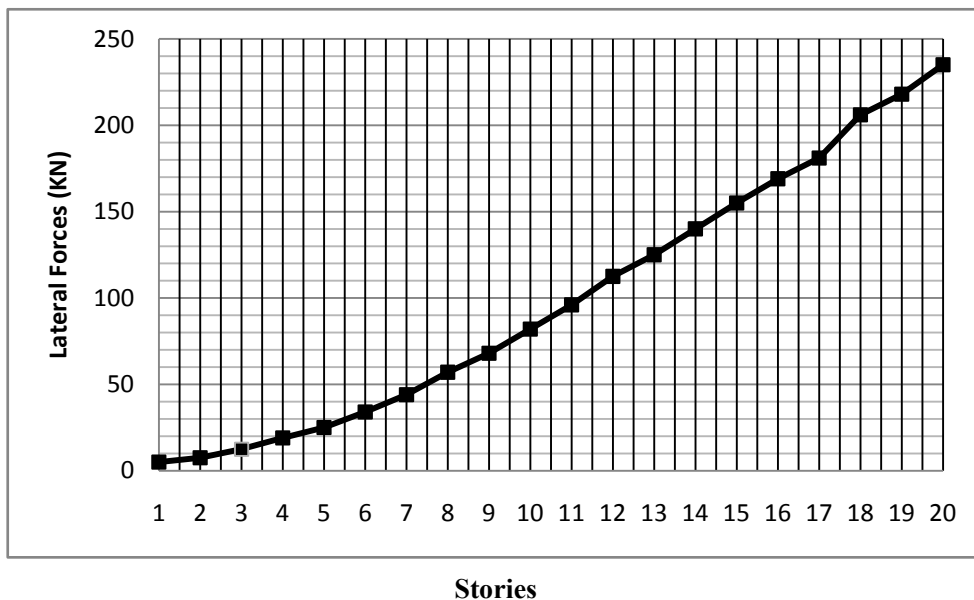


Figure 2. Seismic Stories Lateral Forces Result

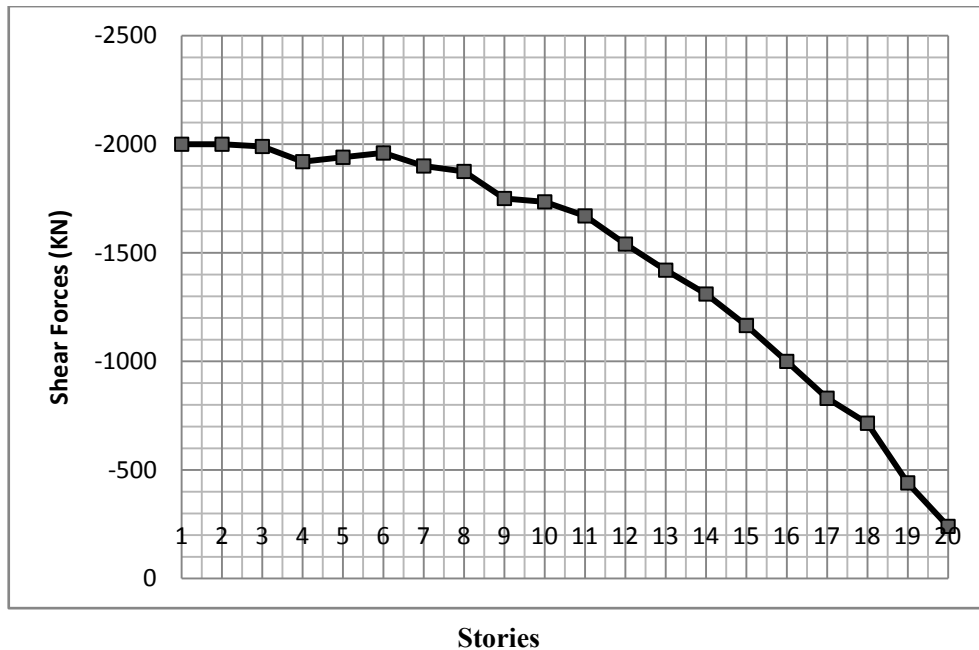


Figure 3. Seismic Base Shear Forces Result

## 5. Conclusions

The high-rise building system in one of possible solutions operationalize the urban system, especially in urban cities with large population. Bujumbura city is atypical cases where the government and other stakeholders in the field should take measures that promote high-rise building instead of leaving the city extend into agricultural areas known for their fertility. Designers and builders should be aware that the Bujumbura site is located the rift valley known for its seismic vulnerability because in some areas, the earthquake has caused human and material damage. In our study, we used the seismic data for Bujumbura site to analyze the behavior of 20 levels building. We find that the seismic shear forces and lateral forces can reach 2000 KN and 230KN respectively.

These forces are enormous and dangerous for high-rise building especially the designers of buildings does not take into account the seismic aspect in calculation of structures.

To prevent the earthquake threat, the decision makers in matters of political policies, engineering and planning professionals need to understand the nature of the hazardous phenomena and take all preventive measures. The decision can be taken at three levels of commitment to implement mitigation and preparedness including the development knowledge, public awareness raising and education, preparedness investments.

## ACKNOWLEDGEMENTS

The author would like to thank all those who contributed to prepare this work.

## REFERENCES

- [1] Midzi V. (1999). Seismic Hazard Assessment in Eastern and Southern Africa. Geosciences Institutes in Bulawayo, Zimbabwe.
- [2] Computers and Structures, Inc. (1995). Extended Three Dimensional Analysis of Building Systems (ETABS Version 9.0.4). Berkeley, CA, USA.
- [3] International Building Code. (2003). Design Response Acceleration SDS and SD1. Berkeley, USA.
- [4] UFC3-310 01. (2005). Earthquake loading data at additional locations outside of the United States, its territories and possessions (Tab.E-1), USA.
- [5] ASCE7, Section 9.5.5.3. (2002). Fundamental period of structural. New York, USA.
- [6] International Building Code. (2003). Design Spectral Response Acceleration, SDS and SD1 (Eq. 16-40 and 41). Berkeley, USA.
- [7] International Building Code. (2003). Maximum Spectral Response Acceleration, SMS and SM1 (Eq.1638 and 1639) Berkeley, USA.
- [8] International Building Code. (2003). Velocity based Site Coefficient, F1 (Tab.1615.1.2-2). Berkeley, USA.
- [9] International Building Code. (2003). Mapped 1.0 Sec Period Spectral Acceleration, S1 (Fig. 1615-2). Berkeley, USA.
- [10] International Building Code. (2003). Acceleration based Site Coefficient, Fa (Table 1615.1.2.-1). Berkeley, USA.
- [11] International Building Code. (2003). Mapped 0.2 Sec Period Spectral Acceleration, Ss (Fig.16151). Berkeley, USA.
- [12] ASCE7, Section 9.5.5.4 (2002). Lateral Force at any level. New York, USA.

- [13] ASCE7, Section 9.5.5.4-2 (2002). Vertical Distribution Factor. New York, USA.
- [14] ASCE7, Section 9.5.5.3.2. (2002). Fundamental Period. New York, USA.
- [15] ASCE7, Section 9.5.5.2 (2002). Seismic Base Shear. New York, USA.
- [16] ASCE7, Section 9.5.5.1 (2002). Seismic Design Factor and Coefficients. New York, USA.